



ROOF SHEATHING SCHEDULE			IRC TABLE R803.1
RAFTER SPACING	SHEATHING MINIMUM NET THICKNESS	EDGE NAILING	FIELD NAILING
24" O.C.	5/8" PLYWOOD / O.S.B.	8d @ 6" O.C.	8d @ 12" O.C.

1- PROVIDE BOUNDARY NAILING AT 6" O.C. INTO SOLID BLOCKING AT TOP OF WALL BETWEEN TRUSSES.
 2-PER R802.10.1 TRUSS DESIGN DRAWINGS SHALL BE PROVIDED TO THE BUILDING OFFICIAL PRIOR TO INSTALLATION. TRUSS DRAWINGS SHALL ALSO BE PROVIDED WITH THE SHIPMENT OF TRUSSES TO THE JOB SITE.

HEADER SPANS SUPPORTING ROOF AND CEILING WITH 50LB GROUND SNOW LOAD				IRC TABLE R8.2.7(1)
MARK	SIZE	BUILDING WIDTH	36"	
RB-01	(2) 2X6	4'-8"	4'-1"	3'-8"
RB-02	(2) 2X8	5'-11"	5'-2"	4'-7"
RB-03	(2) 2X10	7'-3"	6'-3"	5'-7"
RB-04	(2) 1.75x11.875 LVL			

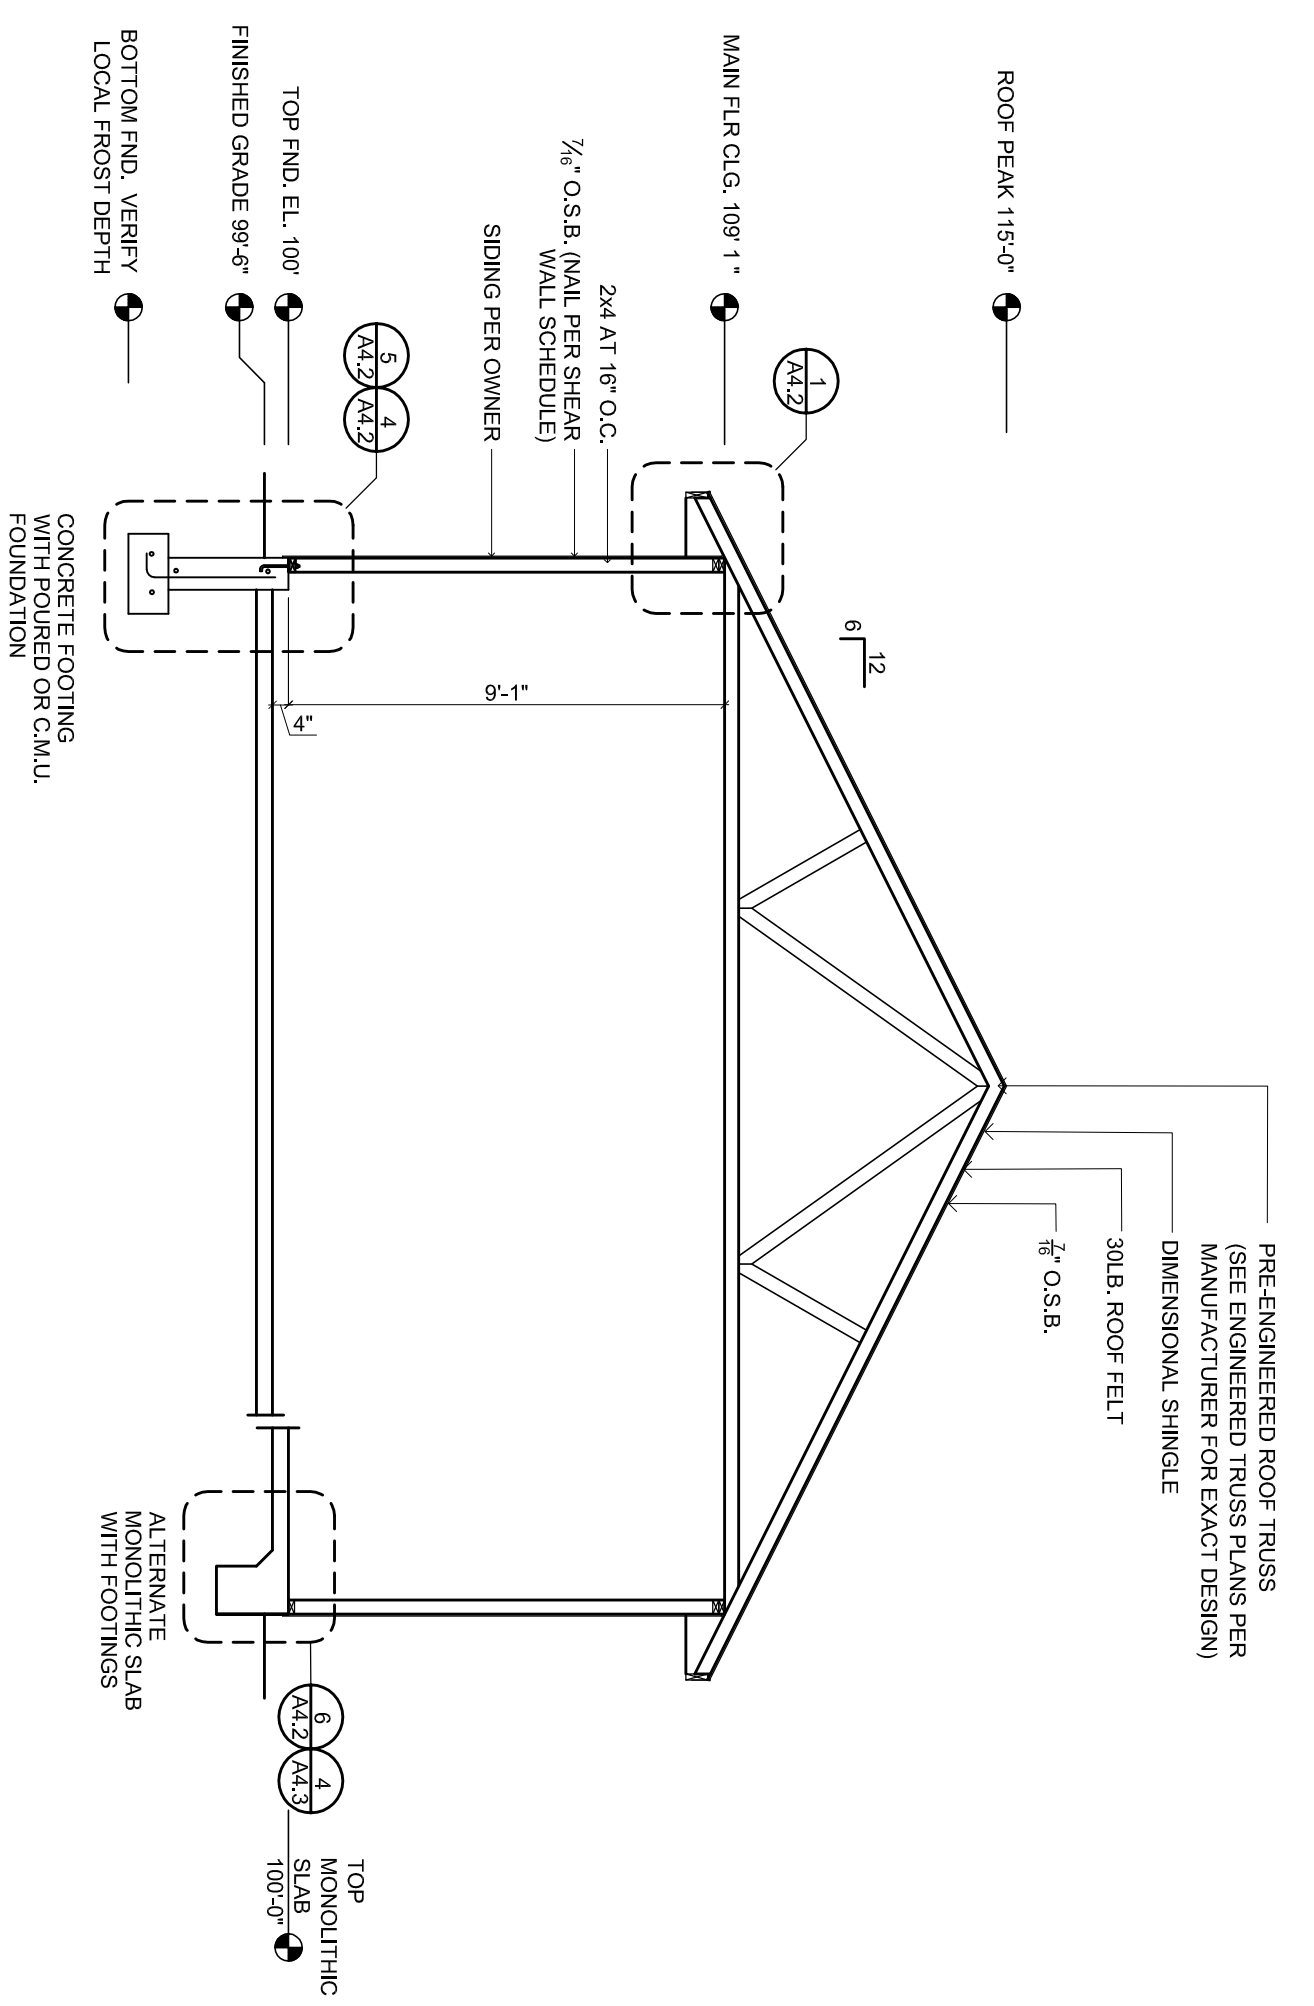

1 BUILDING SECTION - 221
 1/2" = 1'-0"

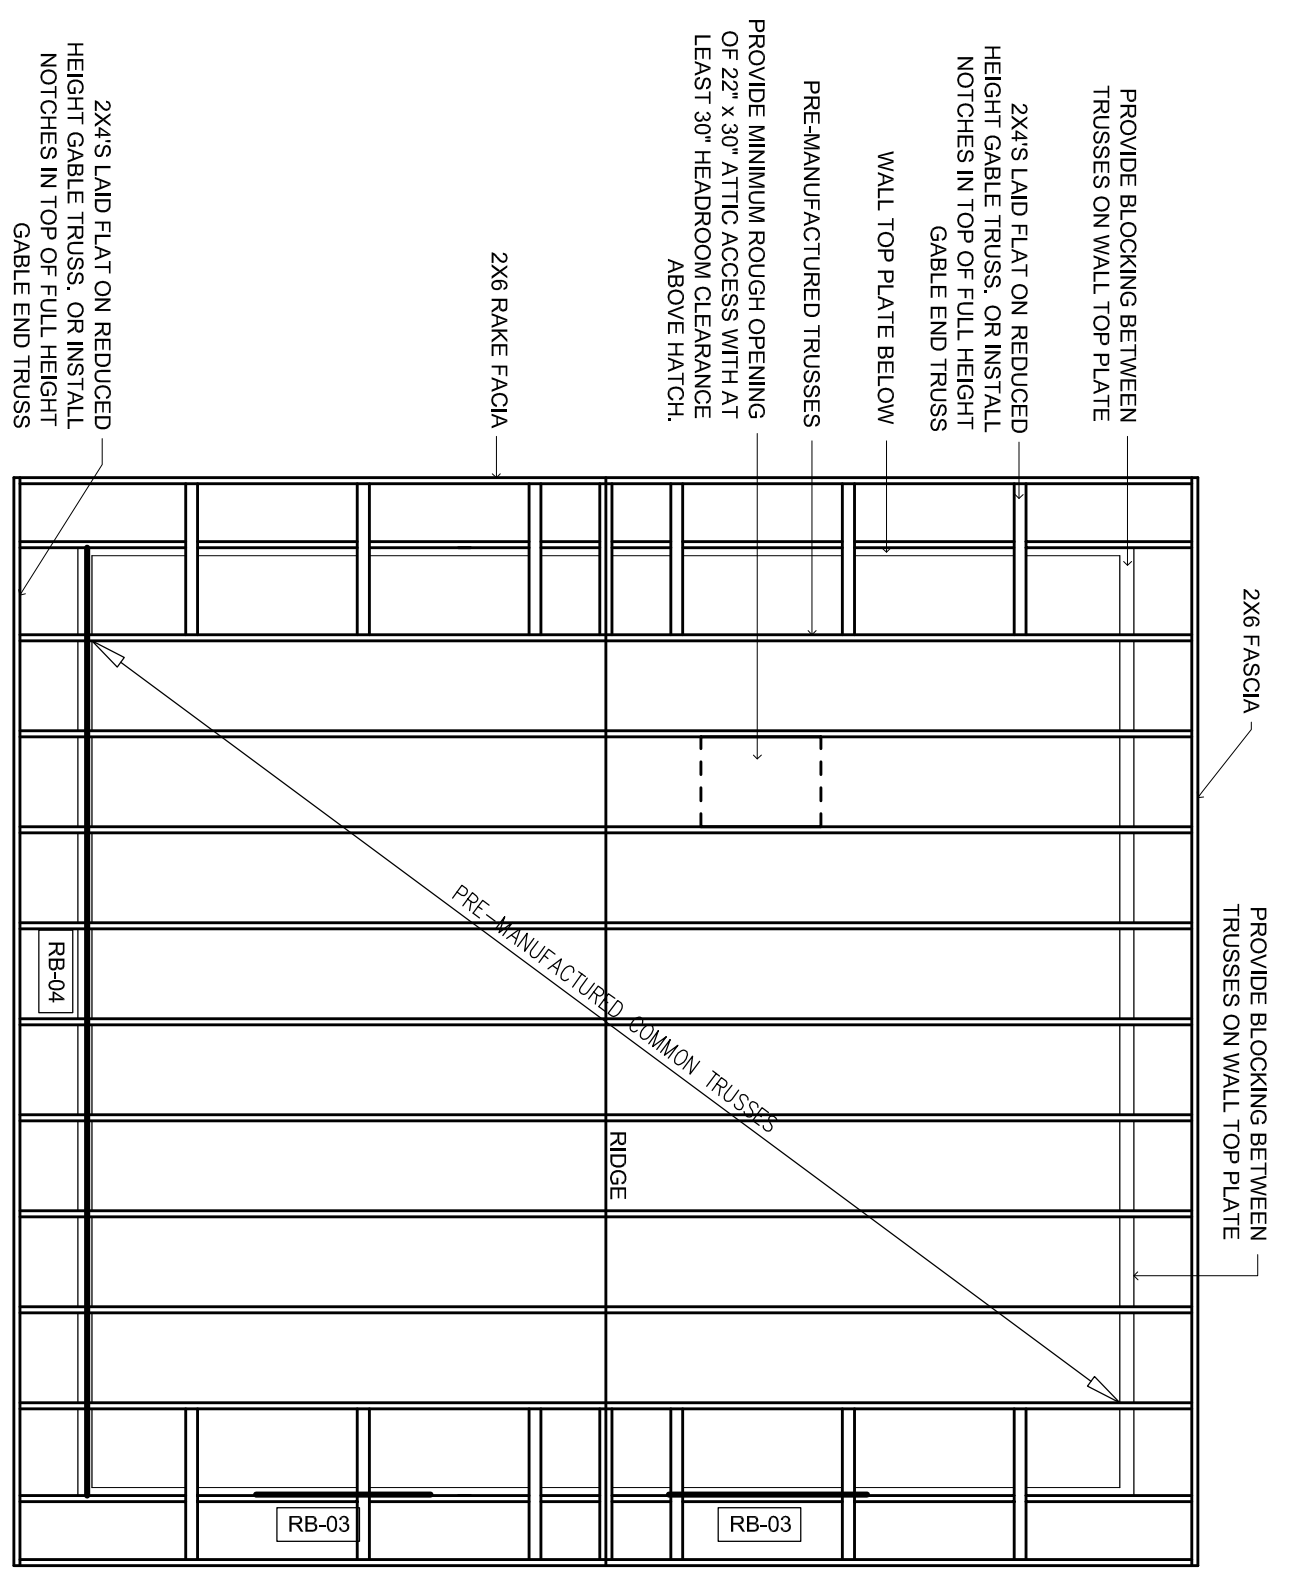

2 ROOF FRAMING PLAN
 1/2" = 1'-0"

PLAN NO. 22x20-2C1D-E

GARAGE PLANS

Big Idea Designs
 www.icreatables.com
 707-901-SHED (7433)

ROOF FRAMING BUILDING SECTION

SCALE: 1/2" = 1'-0"
 DATE:

A4.1